


4E-AM448 / 4E-AM448

4E-AM448 is a DIN-rail mounted surveillance box with 4 amplifier inputs and 4 A/B loudspeaker outputs, dedicated for Impact SW and Impact MM voice evacuation systems

- DIN-RAIL
- RS485 datalink
- Max. load: 500W per channel
- Redundant L-Net link, 2xRJ45
- Addressable: 0-255

Product series

Voice Evacuation

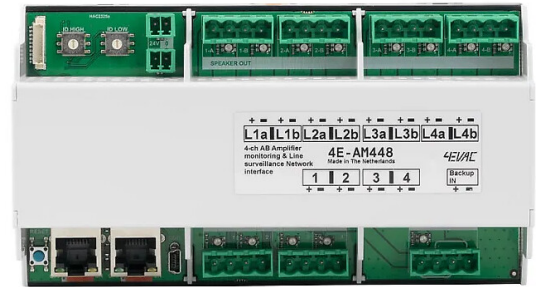

Technical data

Net weight (kg) 0.3

We withhold the right to make changes

Hedengren Security Oy Ab
www.hedengren.com
tel. +358 (0) 207 638 001
security@hedengren.fi
PP.KK.VVV