


## APIC/ESP-CARD / Firelink interface card for addressable loop

An interface card for Firelink air sampling detectors in the addressable loop. Use 1 card per device. In larger systems, you can use a Firelink-400CM detector with a command module (available on order only). It is connected to the loop with an APIC interface card and the other Firelink detectors are connected to the Firelink-400CM device. This helps to reduce the number of interface cards.

- Enables address-specific fire alarm, pre-alarm, fault and service notifications.

SKU	8001121
Product series	Firescape

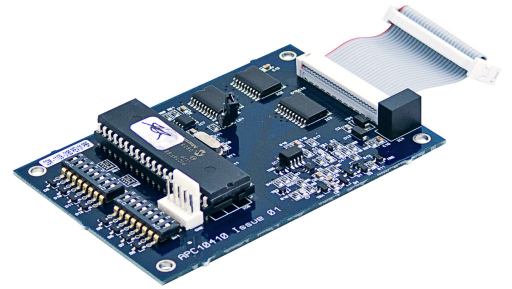

## Technical data

Operating voltage (VDC)	17-41
Operating current, normal (mA)	0.9
Width (mm)	70
Height (mm)	100
Length (Depth) (mm)	25
Net weight (kg)	0.16

