


KFDO-CS-EX2.51P / ATEX classified isolated barrier with 2 channels

A galvanically isolated barrier with 2 channels for ATEX classified areas.

- Complies with the ATEX classification II 1 G E Ex ia II C T5 when Tamb=55°C

SKU 8002427
Product series Firescape

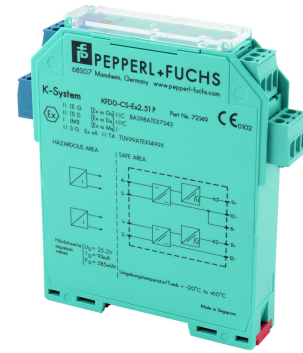

Technical data

| | |
|-------------------------|-----------------------|
| Operating voltage (VDC) | 4 - 35 |
| Ingress protection (IP) | IP20 |
| Mounting method | Din rail installation |
| Width (mm) | 20 |
| Height (mm) | 115 |
| Length (Depth) (mm) | 107 |
| Net weight (kg) | 0.1 |

EN54

We withhold the right to make changes

Hedengren Security Oy Ab
www.hedengren.com
tel. +358 (0) 207 638 001
security@hedengren.fi
PP.KK.VVV